



TC-5062C 6 GHz TEM Cell



Features

- Radiation and susceptibility test
- Broadband TEM Cell up to 6 GHz
- Small size, Small footprint for desktop application
- High effective shielding
- Specifically designed for all types of mobile phones
- Able to install DUT Rotator

*SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE



Product Description

TC-5062C, 6 GHz TEM Cell generates the Electro-Magnetic field for testing small RF devices such as wireless communication receiver, Mobile phone, etc. An external test signal applied through the input port of the TC-5062C generates a consistent and predictable TEM test field inside the cell. The radiation field from a device transmitting in the Cell can also be detected through the port using a test receiver.

The unique compact and economical design is optimized for medium accuracy measurements beyond the standard TEM Cell frequency range.

Theory of operation



TC-5062C 6 GHz TEM cell is made to work beyond the typical TEM Cell operating frequency range limited by cell resonance. A typical TEM Cell is a 2-port symmetrical device; RF voltage is applied to one port while the other port is terminated in 50 ohm while maintaining 50 ohm characteristic impedance along the cell. Due to expansion and contraction parts of the cell, the wave propagation beyond certain frequency is no more propagated by TEM mode alone and creates resonance. To eliminate the resonance problem, the half of the cell is replaced by the wave absorbing material. One commercial implementation is G-TEM cell. The size of the G-TEM design is too large for typical small device applications due to the type of absorber used. TESCOM borrowed the concept of G-TEM, but changed the termination implementation scheme, and designed a very compact broad band TEM Cell that can be used on a desktop.

The operation principle of TC-5062C is essentially the same as TEM Cell. The E-H field inside the test volume is proportional to the input voltage and inversely proportional to the cell height. If a radiating object is inserted inside the cell, the radiated wave toward input port is guided by the transmission line and picked up at the input with a receiver such as a spectrum analyzer. With this method, the RFI from a radiating Device can be measured quantitatively. Since this apparatus is very broadband, it has many applications in the area of EMI, EMS, receiver sensitivity test, etc.

Applications

- Receiver sensitivity testing, Transmitter radiated power testing
- EMI and EMS tests for small Wireless devices

*SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

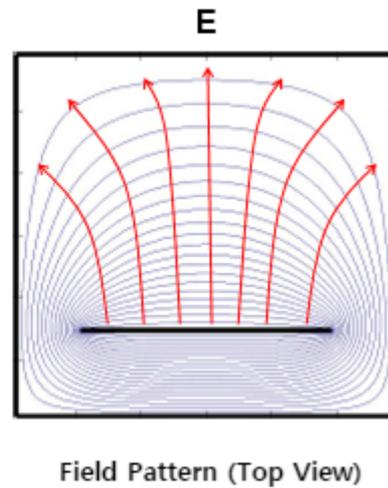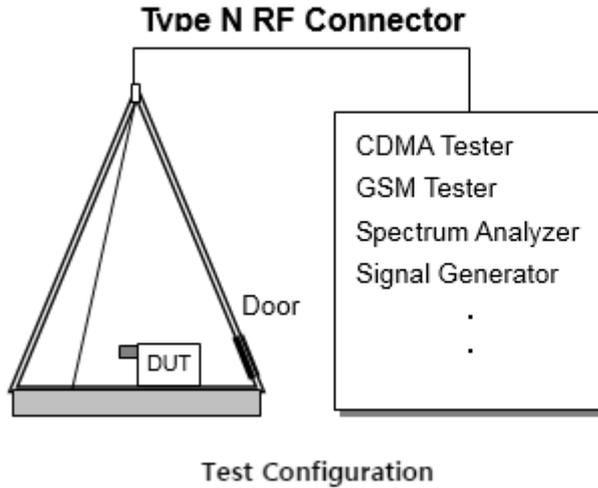

Specifications

General Specification

VSWR	
100 MHz ~ 6 GHz	< 1.7
Effective Cell Height	
	220 mm
Field Strength at Center of Cell	
	13 dB mV/meter at 1 mV input
RF Connectors without module	
	1 N(f) topside, 1 SMA(f) outside and SMA(f) inside
Dimension	
Inside	240(W) x 205(D) mm
Outside	344(W) x 403(D) x 675(H) mm
Door Size	176(W) x 130(H) mm
Weight	
	approx. 19 kg
*Packing	
Size	450(W) x 540(D) x 840(H) mm
Weight	approx. 24.8 kg
*The size or weight of a package may vary on how to pack a package.	

*SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE



Typical RF Shielding

- The shield effectiveness below is measured when the blank panel is mounted; other I/O interface panel results a different shielding effectiveness of the TEM Cell.

Frequency	Shielding effectiveness (dB)
100 to 2000 MHz	> 80 dB
2000 to 3000 MHz	> 80 dB
3000 to 6000 MHz	> 60 dB

F50621A DUT Rotator Component Identification




*SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE



Ordering Information

Order Number	Description
TC-5062C	6 GHz TEM Cell (including accessories below) Test Report RF Cable, SS-402, N(m) to N(m) 2 m (< 6 GHz), 1 pc

I/O Interface Panel

I/O Interface Module	Order Number	Configuration
 DB25 Data Interface Module	M506202A	<ul style="list-style-type: none"> • one(1) DB25(p) outside and DB9(s) inside • Shielding Spec.: <ul style="list-style-type: none"> ◦ > 70 dB from 0.1 to 2 GHz ◦ > 60 dB from 2 to 3 GHz ◦ > 55 dB from 3 to 6 GHz • Working Voltage: 100 VDC • Dielectric Withstanding Voltage: 300 VDC • EMI Filter: 1000 pF Pi filter
 USB 2.0 Data Interface Module	M506204A	<ul style="list-style-type: none"> • one(1) USB A 2.0 outside and inside • Shielding Spec. : > 60 dB from 0.1 to 6 GHz

Optional Accessories

Order Number	Description
4011-0001	RF Cable, SS-402, N(m) to N(m) 1 m (< 6 GHz)
4011-0019	RF Cable, SS-402, N(m) to N(m) 2 m (< 6 GHz)
4011-0020	RF Cable, SS-402, N(m) to SMA(m) 2 m (< 6 GHz)
4003-0004	DATA Cable, DB9(p) to DB9(s) 1 m
4003-0005	DATA Cable, DB25(p) to DB25(s) 1 m
4008-0017	USB Cable, USB A(p) to USB A(p) 1 m
4008-0018	USB Cable, USB A(p) to USB A(s) 50 cm
F50621A	DUT Rotator

*SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE