



Concentric Technology Solutions Inc

Solutions for the Wireless Industry

TC-5916AU-01

Shield Box


Data Sheet



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

Concentric Technology Solutions, Inc.

TEL: 817-503-8862 FAX: 817-503-8866 Email: CTS-Sales@ctscorp-usa.com WWW.RFSHIELDBOX.COM

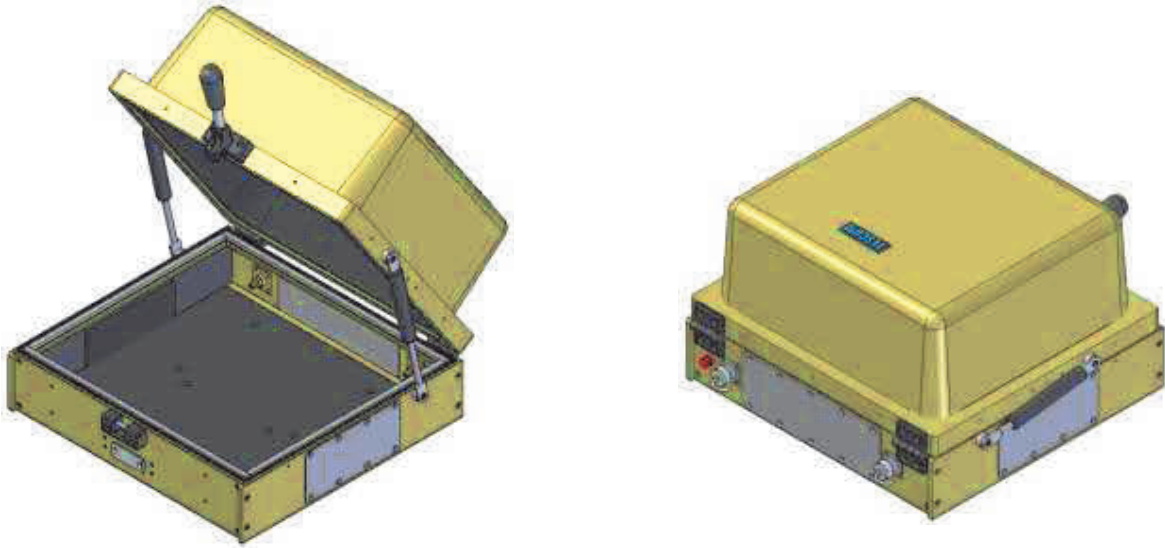

Introduction

TC-5916AU shares the same design and consistent shielding up to 12 GHz as the TC-5915AU but is slightly larger size. The increase in interior working space is suitable for those looking to test larger devices such as tablets and laptops without sacrificing shielding effectiveness. In addition to shielding traditional 2.5 GHz technologies like WIFI, Zigbee, and Bluetooth, this shield box supports a range of up to 12 GHz to enable testing on forward-looking technologies such as 5G, UWB, and WIFI 6E variants. Not only does this shield box offer high RF isolation up to 12GHz, it also offers exceptional Isolation down to 100MHz.

Features

- Reliable high RF shielding from 0.1 GHz to 12 GHz
- Easy opening /closing
- EMI filters on all data ports and power lines
- Easily customizable to suit various test needs
- Shock absorber on the lid

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

Concentric Technology Solutions, Inc.
TEL: 817-503-8862 FAX: 817-503-8866 Email: CTS-Sales@ctscorp-usa.com WWW.RFSHIELDBOX.COM

Mechanical Specifications

Standard RF Connector	Two(2), N(f) outside and SMA(f) inside
Dimensions	
Inside	328(W) x 298(D) x 191(H) mm
Outside	399(W) x 473(D) x 239(H) mm, lid closed. 495(H) mm, lid open.
Weight	Approx. 10 kg
*Packing	
Size	460(W) x 530(D) x 340(H) mm
Weight	Approx. 11 kg

* The size or weight of a package may vary depending on how the product is packed.

RF Specifications

*The shielding effectiveness is measured with blank panels mounted; other I/O interface panel may result in different shielding effectiveness.

Frequency Range	0.1 GHz to 12 GHz
*Shielding Effectiveness (Typ.)	
0.1 GHz to 3 GHz	> 70 dB
3 GHz to 6 GHz	> 60 dB
6 GHz to 12 GHz	> 60 dB

Absorber Reflectivity

Referring to a metal plate (0 dB @ 0.5 GHz to 12 GHz), signal reduction is measured with the RF absorber inserted.


Frequency	Reflectivity (Typ.)
0.1 GHz to 3 GHz	3 dB
3 GHz to 6 GHz	6 dB
6 GHz to 12 GHz	10 dB

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE


Concentric Technology Solutions, Inc.
TEL: 817-503-8862 FAX: 817-503-8866 Email: CTS-Sales@ctscorp-usa.com WWW.RFSHIELDBOX.COM

Outer Dimensions


TC-5916AU-01 Outer Dimensions (WxDxH): 399(W) x 473(D) x 239(H) mm, lid closed. 495 mm lid open.

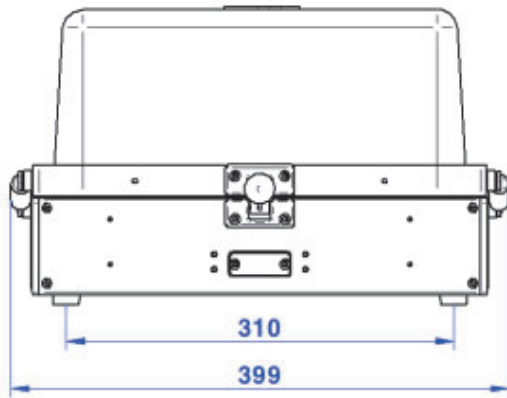


Front View (Closed)

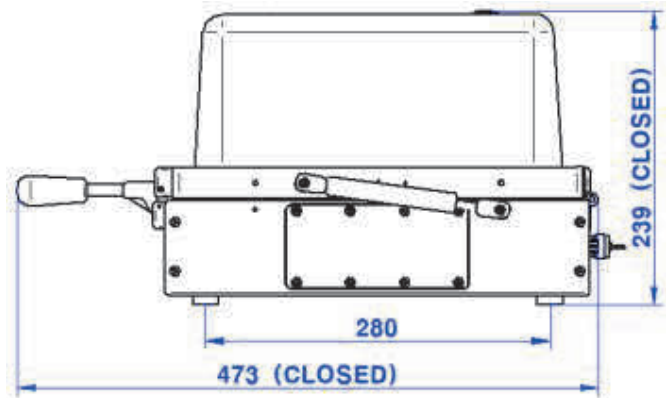

Side View (Closed)

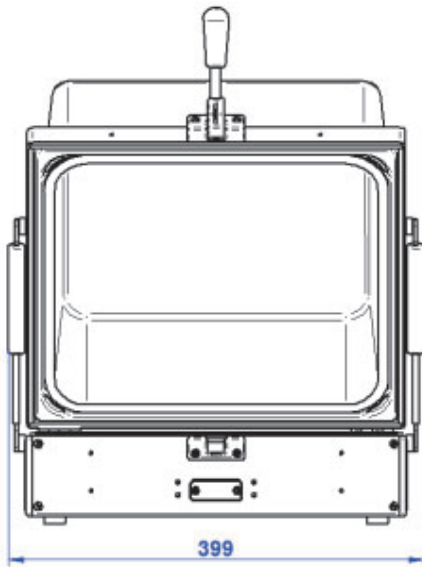

Front View (Opened)

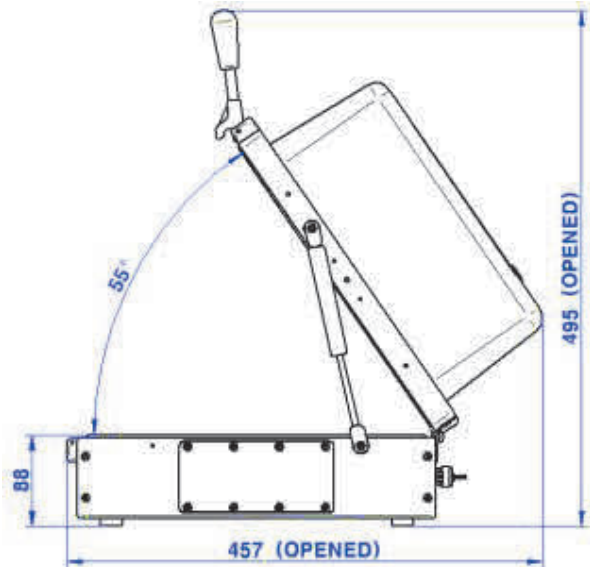

Side View (Opened)


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

Concentric Technology Solutions, Inc.
TEL: 817-503-8862 FAX: 817-503-8866 Email: CTS-Sales@ctscorp-usa.com WWW.RFSHIELDBOX.COM


Inner Dimensions

TC-5916AU Inner Dimensions (WxDxH): 328(W) x 298(D) x 191(H) mm


- Bottom : 328(W) x 298(D) x 61(H) mm
- Top : 328(W) x 260(D) x 130(H) mm

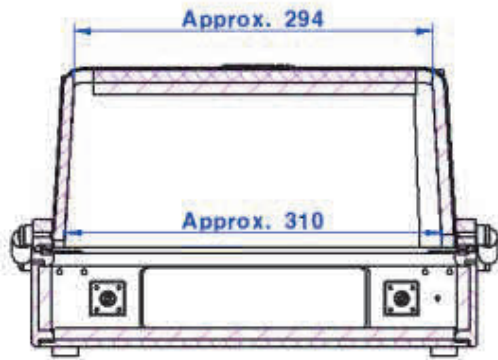

Rear Inner View

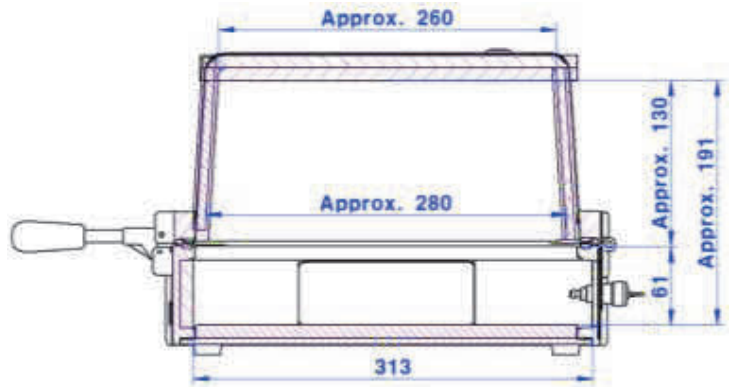

Side Inner View

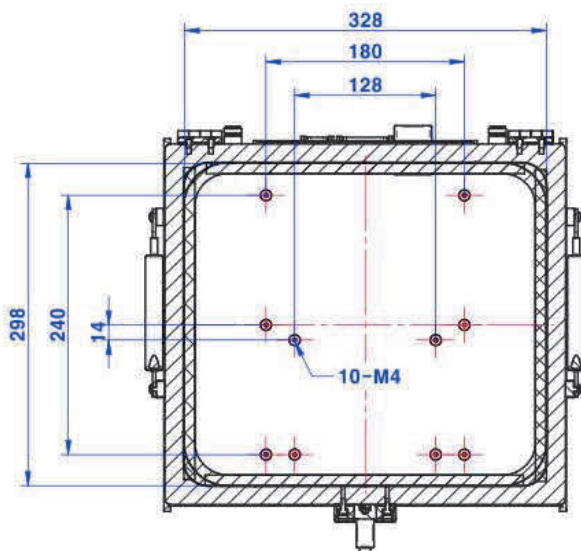

Bottom Inner View

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

Concentric Technology Solutions, Inc.
TEL: 817-503-8862 FAX: 817-503-8866 Email: CTS-Sales@ctscorp-usa.com WWW.RFSHIELDBOX.COM



Ordering Information

Order Number	Product
TC-5916AU-01	Shield Box


Standard Accessories

Product	Description
4011-0144	SS-402, N(m)ST to N(m)ST, 1 m, 1 pc
	Test Report

Pre-configured I/O Interface Panels

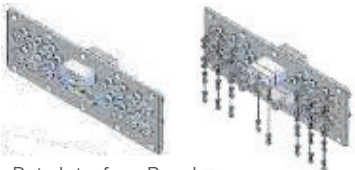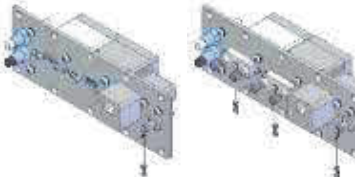Product	Code	Configuration
 <p>Data Interface Panel</p>	M06022A	twelve (12), SMA (f) outside and SMA (f) inside one (1), DB25(p) outside and DB25(s) inside, 1000 pF Pi filter one (1), USB 2.0 outside and inside
 <p>Data Interface Panel</p>	M06025A	one (1), SMA (f) outside and SMA (f) inside one (1), USB 3.2 Gen1 Type-A outside and inside (USB3.0) one (1), USB 3.2 Gen2 Type-C outside and inside one (1), RJ-45 outside and inside one (1), Banana Jack type DC power adaptor

Pre-configured Side I/O Interface Panels


Product	Code	Configuration
 <p>Data Interface Panel</p>	M01010A	Blank Module

Customized I/O Interface Panel is available by selecting below I/O Filters and combine. Please contact sales team.

Fixtures

We offer standard grid fixtures that can change the position of DUT holding blocks. An optimal fit for different shapes of DUT can be made within seconds. Also, fully customized fixtures can be manufactured and supplied if necessary to meet the customer's demands.

In addition to the fixture, various types of antenna coupler options can form an ideal measuring environment for characteristics of each DUT.

Product	Code	Configuration
	F59165B	Antenna Coupler fixed type fixture Antenna Coupler (Optional): TC-93026A 300(W) x 270(D) x 22(H) mm

I/O Filters

I/O Filters	Code	Description	*Typical Shielding
	3409-0009-1 DB25, 1000pF pi Filter	3 Mbps / 100 VDC 5 Amps max	>70 dB from 0.5 to 2 GHz >80 dB from 2 to 3 GHz >70 dB from 3 to 6 GHz
	3409-0014-1 DB25, 100pF pi Filter	10 Mbps / 100 VDC 5 Amps max	>50 dB from 0.5 to 2 GHz >60 dB from 2 to 3 GHz >60 dB from 3 to 6 GHz
	3409-0008-1 DB9, 1000pF pi Filter	3 Mbps / 100 VDC 5 Amps max	>70 dB from 0.5 to 2 GHz >80 dB from 2 to 3 GHz >70 dB from 3 to 6 GHz
	3409-0010-1 DB9, 100pF pi Filter	10 Mbps / 100 VDC 5 Amps max	>50 dB from 0.5 to 2 GHz >60 dB from 2 to 3 GHz >60 dB from 3 to 6 GHz
	3409-0018A-3^(*) USB 2.0 Filter	480 Mbps / 5 V, 500 mA Max Current: 5 A	>60 dB from 0.5 to 2 GHz >70 dB from 2 to 3 GHz >70 dB from 3 to 6 GHz >70 dB from 6 to 12 GHz
	3409-0042A-2^(*) USB 3.2 Gen 1, Type A Filter (Active)	5000 Mbps / 5 V, 600 mA Max Current: 1.5 A	>80 dB from 0.5 to 2 GHz >80 dB from 2 to 3 GHz >75 dB from 3 to 6 GHz >55 dB from 6 to 12 GHz
	3409-0046A USB 3.2 Gen 2, Type C Filter (Active)	10 Gbps / 4 - 22V Max Current: 5 A	>70 dB from 0.5 to 2 GHz >70 dB from 2 to 3 GHz >70 dB from 3 to 6 GHz >70 dB from 6 to 12 GHz

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

Concentric Technology Solutions, Inc.

TEL: 817-503-8862 FAX: 817-503-8866

Email: CTS-Sales@ctscorp-usa.com

WWW.RFSHIELDBOX.COM

I/O Filters	Code	Description	*Typical Shielding
	3409-0022A RJ-45 Filter	1 Gbit/s Copper-Line Ethernet (1000 BASE-T)	>60 dB from 0.5 to 2 GHz >70 dB from 2 to 3 GHz >70 dB from 3 to 6 GHz >60 dB from 6 to 12 GHz
	3406-0004A DC Power Adaptor	50 VDC 3 Amps max	>70 dB from 0.5 to 2 GHz >80 dB from 2 to 3 GHz >80 dB from 3 to 6 GHz >70 dB from 6 to 12 GHz
	3406-0005A (Black) 3406-0006A (White) DC Power Adaptor (Banana Jack Type)	50 VDC 10 Amps max	>70 dB from 0.5 to 2 GHz >80 dB from 2 to 3 GHz >80 dB from 3 to 6 GHz >70 dB from 6 to 12 GHz
	3103-0009A AC Power Adaptor	250 VAC 7 Amps max	>70 dB from 0.5 to 2 GHz >80 dB from 2 to 3 GHz >80 dB from 3 to 6 GHz >70 dB from 6 to 12 GHz
	3408-0100 RF, N-SMA Connector	From DC to 12 GHz 50 Ω / 1.3 max	N/A
	3408-0101 RF, SMA-SMA Connector	From DC to 18 GHz 50 Ω / 1.3 max	N/A

*Typical Shielding is an estimated value with I/O interface applied.

** Exclusive cables should be used. (USB Cable, 4008-0079A, 2 M, USB 3.0 A(M) - USB 3.0 A(M), Housing: Aluminum)

The data above were measured by TESCO standards, and they may be different depending on the measuring method and environment.

Each shielding effectiveness is measured without any cable, so it will be likely affected when a cable is connected.

Also, it may vary depending on the type of cable.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE